



中山聯昌電器有限公司
Zhongshan Lianchang Co., Ltd.

Zhongshan Lianchang Co., Ltd.

Factory House, Zone B, Changmingshui Industrial Zone, No.23,
Changyi Road, Wuguishan, Zhongshan, Guangdong, China
(Postcode : 528458)

United International Co., Ltd.

12F, No. 520, Section 4, Ren-Ai Road, Taipei, Taiwan



AMAZON



ALIBABA



中山聯昌電器產品型錄

UNITED INTERNATIONAL PRODUCTS

2001年 於中山市設立中山聯昌電器

2021年 中山聯昌電器展開新的開始

遷至中山市五桂山建立全新的生產基地，
統合上游物料、成品組裝、倉儲出貨，
優化生產管理動線以提升服務效率，
打造更完整的中山聯昌工業園區。

2021. Oct: A New Leap in Business:

Zhongshan Lianchang starts a new page in business.

We build and move to a new Manufacturing Site!

Zhongshan Lianchang Industrial Park combines component sites, assembly factory and ware houses together. The compact supply network could strengthens horizontal and vertical communication, enlarging the producing efficiency.

We've set some great milestones in the past 20 years, and we look forward to achieve a better success in the future.



中山聯昌，專業家電代工製造商

移動空調、除濕機、空氣清淨機與淨水機

專業研發移動式生活家電，期望解決生活中的空氣與飲水問題

創新、品質、穩定，二十年的堅持，始終如一

+專業研發代工

中山聯昌電器是來自臺灣的專業研發團隊，從1995年開始，在廣東OEM/ODM專業代工市場穩健紮根。中山聯昌自詡為空氣大師[Air Master]，解決生活中的空氣問題: 溫度[冷/暖 移動空調]、濕度[除濕機/加濕機]、潔淨度[空氣清淨機]以及清新度[淨化芳香機]。

+未來概念創新

活化思考才能持續推出成功產品。質感複合性產品是我們這個階段的發想方向，一機滿足多樣潛在需求；極簡化繁複的選擇與操作，讓智慧生活再進步，升級為單純生活。

+永續經營觀

聯昌追求空氣與水資源的處理、再利用；產品設計的方針是減少破壞[空間與環境]、增加共用性[多用途]、改善效率[節能再利用]，我們期許跟社會、環境永續發展與經營。

United International Co., Ltd. x Zhongshan LianChang Co., Ltd.

Experienced Manufacturer in Portable Home Appliance

Product Line: Portable Air Conditioner, Dehumidifier, Air Purifier

Zhongshan LianChang, one of the professional ODM/OEM manufacturers in China. Our experience R&D team from Japan and Taiwan home appliance industry build us an "AirMaster", specialized in Portable Air Conditioners, Dehumidifiers and Air Purifiers. We are keen to create SMART compound products satisfying users' multi-needs. We want to follow users' lifestyle, simplifying complex operating procedures in life.

Zhongshan LianChang believes in the balance and fairness of creatures on earth. Thus, we utilize the reuse and recycle of Air and Water resource in pursuit of the sustainable developments in business and environment.

代工貼牌/內銷合作/跨境電商(阿裡巴巴/亞馬遜) OEM & ODM/ Cross-Border Ecommerce(ALIBABA/ AMAZON)

+ 为世界代工 - [客制化能力 深广的知识]

中山联昌向每位客户负责，对每台产品用心，为了了解不同国家产品需求，我们钻研各国的环境、法规与文化。透过这么多的努力，成功将产品推广至世界各个角落。

我们承诺，中山联昌电器有专业能力客制化(OEM/ ODM)提供最符合需求的产品。

ODM/ OEM Up-to-Date products

To align with customers' growing needs, we dedicate ourselves to investigating environment, product legislation and culture of various countries. Now we successfully expand our business globally. We commit to providing right products to the right place.

+ 专利技术与创新概念 - [科技应用 活化新品]

联昌的核心竞争力在研发与创新，联昌拥有30种以上专利，保障技术领先；我们也重视科技应用，获当地政府认可为高新技术企业。新品的推出是中山联昌运转的活力，融合各文化美学设计的多变外观，团队合作发想出的结构与概念，确保产品线持续更新与扩大。

Dynamic Innovation Capability

The core competitive advantage of Zhongshan LianChang is the innovating capability. Our R&D department developed reliable products each year, therefore, we've owned over 30 patents ranging from invention, utility and design in China .

+ 多国产品认证 - [质量稳定 安全合格]

中山联昌通过多项测试与检验，取得各国产品安规证书，与能效、环保认证，适用国家涵盖美、欧、亚、澳、北非、中东等地。

联昌多款合格认证产品，省去您冗长检验、登录时间与成本，帮助快速进、出口；我们亦提供专业知识辅助，协助新认证申请与取得。

Multinational Certified & Approved

Certified by over 50 countries, we promise to provide safe and approved products without lengthy applying and inspecting process.

Certificate:

CB/ CE/ GS/ PCT/ cETLus/ CCC/ BSMI/ SASO-ICCP ;
Energy Star/ ROHS/ WEEE

产品组合

Product Mix

中山联昌产品研发的核心理念从各个层面发想，多元的切入点，才能不断设计出原创且符合用户需求的产品：

解决问题 → 产品价值提升 → 用户体验与生活



Our product developing concept and purpose based on various perspectives, to ensure our products continuously meet users' need:

From Problem → Product Value → User Experience



移 動 空 調

- **Portable Air Conditioner:**

Cooling and Heating function to adjust the temperature.
Dehumidifying function to reduce the moisture in air.
Ventilating to drive the air flow refreshing the ambient air



溫度調節 - 移動空調(製冷)

HOW & WHY TO USE PORTABLE AIR CONDITIONER



彈性達到舒適的溫度

媲美櫃機的高冷量與雙馬達加大風量，可以快速帶動室內氣流。具有隨插即用、免安裝、不滴漏、輕便移動等特性，不管在(室內)廚房、臥室、浴廁或室外陽臺、院子晾衣服都可以使用!

Easily Adjust the Indoor Temperature

Powerful cold air with strong air volume efficiently lead the air flow moving around the ambience, and cool down instantly. With features: **“Plug to use”**, **“Simple install”**, **“No Drainage”** and **“Easy to move”**, users can use either indoor(Toilet/ Bedroom/ Kitchen) or outdoor(Yard/ Balcony) anytime.

溫度對工作效率的影響

經研究證實，環境溫度在25-26度時，可以達到最大的工作績效! 體溫一高，人就會煩燥無法專注與思考，疲勞度也大增。夏天時使用移動空調可加強中央空調不足處; 下班斷電時也能針對加班員工使用，使用性多元且方便!

Room Temperature and Productivity (Working Efficiency)

Proved by reports, changes in room temperature affect the working performance. The highest productivity is at temperature of around 25-26 °C. Portable ac can strengthen the cooling performance of central air conditioning system in extreme summer days, or use for working overtime staffs in power off office.

濕度控制 - 移動空調(除濕)

HOW & WHY TO USE PORTABLE AIR CONDITIONER



強效濕度控制

日除濕量可達50~65L，可有效取代市面大多數除濕機! 室內跟人體都乾爽、舒適。

一機多用、跨季使用，除濕效率驚人，簡單且直覺使用

Efficiently Remove the Moisture

Remove 50~65Liters of water per day, beat most of the dehumidifiers in market. Make users and the ambience cool and dry, comfortable all the time. Unnecessary to buy additional unit, save the space and the cost. Powerful dehumidifying with simplest control.

過高濕度的影響

太過潮濕易導致人體呼吸道跟皮膚過敏，空氣中也容易孳生細菌、黴菌，造成食物腐敗、衣物器具發黴。為了使用者的健康與生活的舒適，建議適當使用除濕功能!

Too Much Humidity Cause Problems

Damp and moisture indoor may generate molds and mildew, triggering allergic symptoms on skin or respiratory system, making the food, furniture and clothes collapse easily. The moisture penetrates into the wall hurts the building as well.

5 Reasons to Have Portable Air Conditioner

- 1) Simplest installation, just plug to use
- 2) Movable unit, can share to use among rooms
- 3) Open-space operation, use without closing door
- 4) Self-Evaporation without draining or leaking
- 5) Waterproof design (IPX), outdoor using available

Our Unique Features

1) Built-In Duct:

Easy to store, Save space, Better looking


2) Exchangeable air outlets :

Efficiently use the cold and hot air in multi-ways

3) Waterproof design(IPX):

Durable water and dust proof cases and mechanism

Multi-Application AC



- 1) Exchangeable air outlets : Vent and Hose
- 2) Special air duct design
- 3) Water/ Dust proof cases

Our 3in1 Series has special exchangeable air outlets, user can use either cold or hot air by exchanging the air vent and exhaust hose.

Moreover, the IPX water/ dust proof case enable users putting unit outdoor and lead the cold air into ambience through the hose. The portable ac changes to be a outdoor unit, saving space and lowering noise for users!

*Convenient accessory: Adapt the D type window kit on wall, users can control through panel or the remote controller.



Industrial Portable AC

PC-MMA

工业移动空调





Industrial Portable AC

PC-MMA

注塑外观·圆润造型
适用大面积室内空间: 住宅、办公场所
腰部内凹把手·搭配万向脚轮·便于搬运移动
附双清洗滤网·高效防尘防砂土
冷气模式自动蒸发免排水; 除湿模式可接管排水
可面板控制、可遥控

Injection case with smooth finish.
Applicable for wide indoor ambience
Handles by the waist and sliding wheels to move.
Two washable filters, block the dust and particles.
Self-Evaporate the condense water, non-draining ac.
Control with Touch-Pad on top, or remote controller.

顶部与前方双LED显示设计
电子触控屏
弹性温度设置：17~25度
具连续除湿
叶片可自动摆动(限垂直·水平叶片手动)
具0-24小时定时开机/ 关机功能

LED display on both top and front.
Touch-Pad with clear icons.
Flexible temperature setting: 17~25°C
Independent continuous dehumidify mode.
Swing blades: Auto(vertical)/ Manual (horizontal).
On/ Off timer: 0~24 hour.



触摸屏 Touch Panel


Industrial Portable AC

PC-MMA

特制接管配件: 冷出风口接管
可一机多房冷却或除湿
可对人直吹 · 或连接机房设备冷却降温

Transfer to **Spot Cooler AC** with special hose accessory.
1 to 2 cooling or dehumidifying.
Use for either people or equipment.



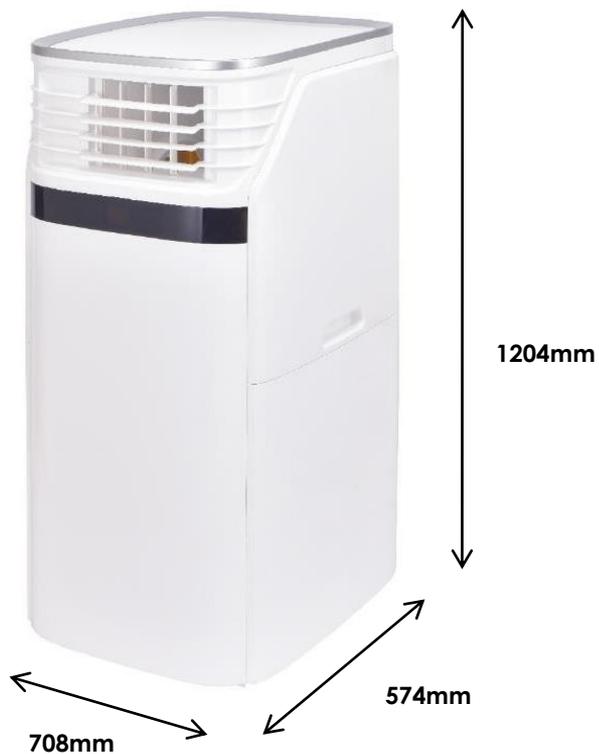

产品型号 Model	PC53-MMA	PC65-MMA	PC70-MMA
制冷能力 Capacity (BTU/ W)	18,000BTU (5,300W)	22,000BTU (6,500W)	24,000BTU (7,000W)
日除湿量 (30°C, RH80%) Dehumidification	90L/ Day	120L/ Day	150L/ Day
音量 Noise	65 dB	65 dB	65 dB
冷媒 Refrigerant	R290/ R410a	R290/ R410a	R290/ R410a
净/毛重 Net / Gross Weight	53/ 61 kg	53.5/ 61.5 kg	54/ 62 kg
产品尺寸 Dimension (mm)	W541*D702*H1142	W541*D702*H1142	W541*D702*H1142
包装尺寸 Packaging (mm)	W590*D775*H1290	W590*D775*H1290	W590*D775*H1290
装柜量 (20' / 40' 40'HQ)	25/ 55/ 119	25/ 55/ 119	25/ 55/ 119

Industrial Portable AC

PC-MMS/MMR

工业移动空调






Industrial Portable AC

PC-MMS/MMR

板金外壳·防锈、防泼水·坚固耐用
冷气模式自动蒸发免排水；除湿模式可接管排水
顶部出热风·减少使用空间限制
可清洗双层滤网·高效防尘防砂土
万向脚轮·方便移动
可面板控制、可遥控

Anti-Rust processed and IPX certified metal case
Self-Evaporate condense water without draining. (AC)
Drain with water pipe when dehumidifying. (No tank)
Washable filters block the dust and sands.
Movable with sliding castors.
2-Way control with panel or remote controller.

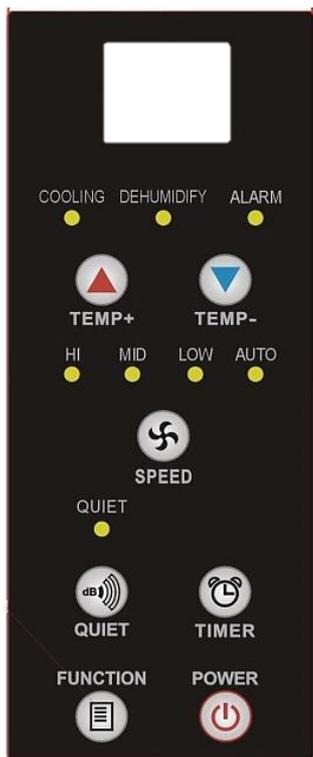

温度、湿度双重显示
电子按键控制
弹性温度设置：17~25度
具连续除湿
具0-24小时定时开机/关机功能

Temperature/ Humidity display.
Electronic Panel with LED display.
Flexible temperature setting: 17~25°C
Independent cont. dehumidify mode.
On/ Off timer: 0~24 hour.



电子按键 Electronic Panel

Industrial Portable AC

PC-MMS

顶部排热风，可将产品靠墙边、更弹性使用
特制接管配件：冷/热出风口接单或双管
可一机多房冷却、除湿或排风
可连接工厂、机房设备降温

*Exhaust hot air from top, more convenient to place the unit and exhaust hot air. Unnecessary to leave space between unit and wall.

*Hose Accessory: Adapt to either cold or hot air outlet, single or double ducts

*1-to-multiple rooms cooling, dehumidifying or ventilating

*Could spot-cooling equipment or machine



Cool Air Outlet



Hose Adapter



2 Hoses Connection

Industrial Portable AC

PC-MMR

后方排热风，视觉上更美观、简洁
特制接管配件：冷/热出风口接单或双管
可一机多房冷却、除湿或排风
可连接工厂、机房设备降温

- *Exhaust hot air from backside, tidily hide the hose.
- *Hose Accessory: Adapt to either cold air outlet, with single or double ducts
- *1-to-multiple rooms cooling, dehumidifying or ventilating
- *Could spot-cooling equipment or machine



Cool Air Outlet



Hose Adapter



2 Hoses Connection



PC-MMR

PC-MMS

产品型号 Model	PC53-MMS PC53-MMR	PC65-MMS PC65-MMR
制冷能力 Capacity (BTU/ W)	18,000BTU (5,300W)	22,000BTU (6,500W)
日除湿量 (30°C, RH80%) Dehumidification	60L/ Day	65L/ Day
音量 Noise	65 dB	65 dB
冷媒 Refrigerant	R290/ R410a	R290/ R410a
净/毛重 Net / Gross Weight	71/ 80kg	74/ 83 kg
产品尺寸 Dimension (mm)	W574*D708*H1142	W574*D708*H1142
包装尺寸 Packaging (mm)	W623*D793*H1300	W623*D793*H1300
装柜量 (40'HQ)	106pcs	106pcs

除湿機

- Dehumidifier:
Reduce the humidity and Dry the moist stuffs



产品用途 - 除湿机(除湿)

HOW & WHY TO USE DEHUMIDIFIER



强效湿度控制

弹性湿度控制30%, 40%...90%, 可配合天气跟空间调整!
还有不同模式: 干衣、连续除湿CO、舒爽AU、睡眠SLEEP、清净CL, 除了使室内跟人体都干爽、舒适, 还能抑止细菌、霉菌滋生, 健康更升级。

Efficiently Remove the Moisture

Setting the desired humidity flexibly from 30%, 40%... to 90% in different weather. Also provide various smart modes: Continuous Dehumidification[CO], Comfort Mode[AU], Sleep Mode[SLEEP] and Purification[CL].
Waive the damp, the mildew, the bacteria and the odor.
Make users and the ambient in comfortable and healthy conditions.

过高湿度的影响

太过潮湿易导致人体呼吸道跟皮肤过敏, 空气中也容易孳生细菌、霉菌, 造成食物腐败、衣物器具发霉。为了使用者的健康与生活的舒适, 建议适当使用除湿功能!

Too Much Humidity Cause Problems

Damp and moisture indoor may generate molds and mildew, triggering allergic symptoms on skin or respiratory system, making the food, furniture and clothes collapse easily. The moisture penetrates into the wall hurts the building as well.

除湿机作用与效果

Function and effect of dehumidifier



防止食物腐败
Food Spoilage



防止衣服发霉
Mildew Clothes



避免墙壁白华
Damp Wall



除湿机的5种好处

- 1) 使环境干爽、舒适
- 2) 连绵雨季好干衣
- 3) 降低皮肤、鼻子与呼吸系统过敏不适
- 4) 减少细菌、霉菌滋生机会
- 5) 避免物品发霉、腐败异味(书、食物、家具)

独家特点

- 1) 温风除湿: 可同时暖被、烘鞋
- 2) 24小时开机/关机定时: 随时放心、弹性使用
- 3) 两用排水: 用水箱储水, 或接水管连续排水
- 4) 透明彩色水箱: 可清楚辨认水箱水位
- 5) 自动除霜与水箱水满警报

5 Reasons to Have Dehumidifiers

- 1) Make ambient dry and comfortable
- 2) Dry clothes in rain season
- 3) Reduce the generates of nose and skin allergens
- 4) Lower the breeding of bacteria and mildew
- 5) Free from odor of mould (books, food, furniture)

Our Unique Features

- 1) Warm air dehumidifier: Dry blanket & warm shoes
- 2) 24 hour ON/ OFF timer: flexible and safe to use
- 3) Tank with Pipe connection: Continuous draining
- 4) Transparent water tank: Easily see the water level
- 5) Self-Defrost and Tank Full Alarm

Industrial Dehumidifier

PD-VAE

工业除湿机





Industrial Dehumidifier

PD-VAE

金属外壳·防锈、防泼水、坚固耐用
附水箱储水、倒水·或可接水管引出
前壳带装饰灯条·满水变色示警
两侧把手与万向脚轮设·方便搬、挪动
高密度尼龙滤网·可重复清洗

Durable metal case, anti-dust and moist
2-Way drainage through hole/ pipe, or store in tank
Light bar in front case, turn red when water is full
Handles by sides and wheels is convenient to move
Equipped with washable high density filter.

Industrial Dehumidifier

PD-VDE

金属磨砂外壳·防锈、防泼水、坚固耐用
附可拆卸推拉杆·移动机台好省力
附固定脚柱与加大脚轮·适用各种地形
附水箱储水·倒水·或可接水管引出
高密度尼龙滤网·可重复清洗
(选配)打水泵自动排水·扬程5米

Matt finished metal case, anti-dust and moist
Extend handle save users force to pull the unit
Giant wheels and foot stoppers for all terrain
2-Way drainage through hole/ pipe, or store in tank
Equipped with washable high density filter.
(Optional) Water pump with 5 meter lift



双道旋转叶片，可完全关闭防尘、防异物
便利电源线缠绕架，好收纳、防止打结
加大水箱容量达5.6L，好取出、好倒水
(选配)可外接加厚HEPA滤网，净化更升级



2-Layer blades, close to block dusts or objects.
Power cord rack to store and protect the wire.
Extra large water tank with handles: 6.5 Liters.
(Optional) External-attached HEPA filter frame.





电子按键 Electronic Panel



Industrial Dehumidifier

PD-TAE

弹性湿度设置：RH30%~90%
0-24小时定时开机/关机功能
环境/设定湿度显示
两段风速调整
低温自动除霜
水满自动停机

Flexible humidity setting: RH30%~90%
Timer from 0-24, Auto-On or Off
Ambient or Setting humidity display
2-Step fan speed
Self-Defrost in low temperature
Water full alarm



产品型号Model	PD60-VAE	PD80-VAE
日除湿量(30°C,RH80%) Dehumidification	60L/ Day	80L/ Day
日除湿量(27°C,RH60%) Dehumidification	30L/ Day	40L/ Day
音量 Noise	62 dB	64 dB
冷媒 Refrigerant	R290/ R410a	R290/ R410a
净/毛重 Net / Gross Weight	24.5/ 26.5kg	26.5/ 28.5kg
产品尺寸 Dimension (mm)	W400*D310*H645	W400*D310*H645
包装尺寸 Packaging (mm)	W488*D409*H720	W488*D409*H720
装柜量 (20' / 40' 40'HQ)	192/ 405/ 405	192/ 405/ 405

Industrial Dehumidifier

PD-TAE

工业除湿机





Industrial Dehumidifier

PD-TAE

金屬外殼，防鏽、防潑水、堅固耐用
自然排水，可接水管引出
兩側把手與萬向腳輪設，方便搬、挪動
高密度濾網與濾網蓋，加強防塵
(選配)打水泵自動排水，揚程5米

Durable metal case, anti-dust and moist
2-Way drainage through bottom hole or pipe
Handles by sides and wheels is convenient to move
Equipped with washable high density filter.
(Optional) Water pump with 5 meter lift

彈性濕度設置: RH10%~90%
具0-24小時定時開機/關機功能
環境溫度/濕度顯示
兩段風速調整
低溫自動除霜
水滿自動停機

Flexible humidity setting: RH10%~90%
Timer from 0-24, Auto-On or Off
Ambient temperature or humidity display
2-Step fan speed
Self-Defrost in low temperature
Water full alarm



电子按键 Electronic Panel

Industrial Dehumidifier

PD-TAE

顶部排热风，可将产品靠墙边、更弹性使用
特制接管配件：冷/热出风口接单或双管
可一机多房冷却、除湿或排风
可连接工厂、机房设备降温

*Exhaust hot air from top, more convenient to place the unit and exhaust hot air. Unnecessary to leave space between unit and wall.

*Hose Accessory: Adapt to either cold or hot air outlet, single or double ducts

*1-to-multiple rooms cooling, dehumidifying or ventilating

*Could spot-cooling equipment or machine




Air Outlet



Hose Adapter



2 Hoses Connection

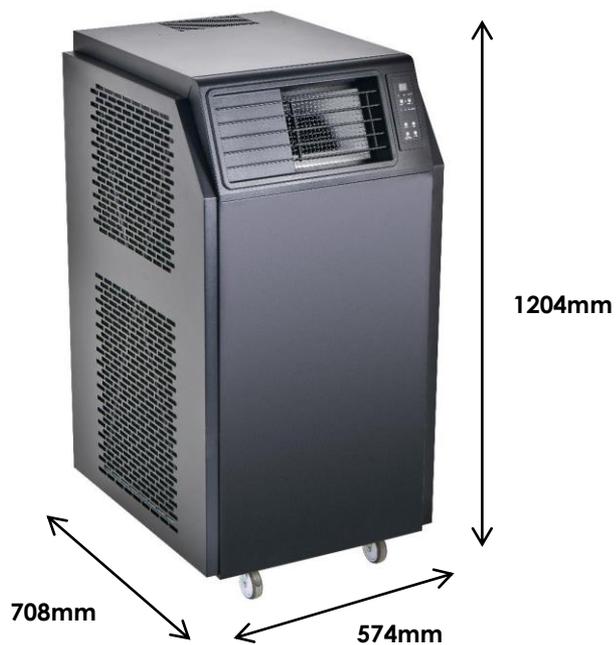

电气参数 Electrical data				
产品型号 Model			PD240-TAE	PD288-TAE
电源 Power supply		Ph-V-Hz	230V-50HZ	
控制面板 Control			Electronic	
日除湿量 Dehumidification	30°C,RH80%	L/Day	240	288
功率 Power consumption	30°C,RH80%	W	2000	2400
冷媒 Refrigerant type		g	R410A	
水箱容量 Water tank volume		L	N/A	
风量 Air flow		m3/h	1600	
产品规格 Dimension & Weight				
产品尺寸 Unit dimensions (W*D*H)		mm	W 574 x D 708 x H 1204	
包装尺寸 Packing dimensions (W*D*H)		mm	W 623 x D793 x H 1300	
装柜量 Container Loading (MOQ: 40'HQ)		EA	40'HQ: 106pcs	
净重 Net weight (kg)		Kg	74	80
毛重 Gross weight (kg)		Kg	83	89
适用环境 Applicable ambient				
适用环境温度 Ambient temp		°C	5°C-35°C	
排水形式 Drainage mode			自然排水	

Industrial Dehumidifier

LD90-01AE

工业除湿机





特殊工艺外壳，坚固耐用
顶部排风，降低对使用者干扰与环境的影响
多种排水方式（自然排水、水箱排水、自动排水）
自动排水：水泵，5米扬程
2寸大脚轮，方便移动，带刹车
电子触控面板

Durable bumper case
Exhaust from top, lower the wind's affect to users and surrounds
3-Way drainage: from pipe/ hole, store in tank, pump out
Auto-Pumping with water pump: 5 meter lift
2 inches giant wheels with foot stoppers
Touch pad control

温度、湿度窗双重显示
弹性湿度设置：RH10%~90%，精度1%
具强制连续除湿
具0-24小时定时开机/ 关机功能
低温自动除霜
水满自动停机
具滤网清洗提醒
(选配)WIFI功能
(选配)多台联动模式，有效率地串联控制

Ambient Humidity and Temperature display
Flexible humidity setting: RH10%~90%, with 1% precision
Continuous dehumidifying mode available
Timer from 0-24, Auto-On or Off
Self-Defrost in low temperature
Water full alarm
Filter cleaning/replacement alarm
(Optional) Wi-Fi control
(Optional) Multiple units network, control and detect efficiently



触摸屏 Touch Panel



电气参数 Electrical data		
產品型號 Model		LD90-01AE
電源 Power supply	Ph-V-Hz	230V-50HZ
控制面板 Control		Electronic
日除溼量 Dehumidification	30°C,RH80%	L/Day 90
功率 Power consumption	W	800
冷媒 Refrigerant type	g	R290/ R410A
水箱容量 Water tank volume	L	10
風量 Air flow	m3/h	1000
产品规格 Dimension & Weight		
產品尺寸 Unit dimensions (W*D*H)	mm	520x445x815
包裝尺寸 Packing dimensions (W*D*H)	mm	578x550x870
裝櫃量 Container Loading (20'/40'/40'HQ)	EA	80/168/252
淨重 Net weight (kg)	Kg	40
毛重 Gross weight (kg)	Kg	47
适用环境 Applicable ambient		
適用環境溫度 Ambient temp	°C	5°C-35°C
適用空間面積 Applicable area	M ²	90-120
排水形式 Drainage mode	自然排水/ 水箱/ 自動排水	



Industrial Dehumidifier

LD168-02AE / LD168-02BE

工业除湿机

Industrial Dehumidifier

LD168-02CE / LD168-02DE

加高款工业除湿机



防锈金属外壳·坚固耐用

自然排水方式

两侧把手与万向脚轮设·方便搬、挪动

可多层推送·方便储藏或运输

Anti-Rust processed metal case

Drain with water pipe. (No internal tank)

Mobile dehumidifier with sliding castors

Stackable case design, easy to store and transport



PD168-02AE



PD168-02BE



PD168-02CE



PD168-02DE

溫度、濕度窗雙重顯示
彈性濕度設置：RH10%~90%，精度1%
具強制連續除溼
具0-24小時定時開機/ 關機功能
低溫自動除霜
水滿自動停機
具濾網清洗提醒
(選配)WIFI功能
(選配)多台聯動模式，
可串聯多台產品更有效率控制

Ambient Humidity and Temperature display
Flexible humidity setting: RH10%~90%, with 1%
precision
Continuous dehumidifying mode available
Timer from 0-24, Auto-On or Off
Self-Defrost in low temperature
Water full alarm
Filter cleaning/replacement alarm
(Optional) Wi-Fi control
(Optional) Multiple units network, control and
detect efficiently



触摸屏 Touch Panel



顶部排热风，可将产品靠墙边、更弹性使用
特制接管配件：冷/热出风口接单或双管
可一机多房冷却、除湿或排风
可连接工厂、机房设备降温

- *Exhaust hot air from top, more convenient to place the unit and exhaust hot air. Unnecessary to leave space between unit and wall.
- *Hose Accessory: Adapt to either cold or hot air outlet, single or double ducts
- *1-to-multiple rooms cooling, dehumidifying or ventilating
- *Could spot-cooling equipment or machine





PD168-02AE

PD168-02BE

电气参数 Electrical data

产品型号 Model	LD168-02AE/ LD168-02BE	
电源 Power supply	Ph-V-Hz	230V-50HZ
控制面板 Control	Electronic	
除湿量 Dehumidification	30°C,RH80%	L/Day 168
功率 Power consumption	W	1500
冷媒 Refrigerant type	g	R290/ R410A
水箱容量 Water tank volume	L	NA
风量 Air flow	m3/h	2000

产品规格 Dimension & Weight

产品尺寸 Unit dimensions (W*D*H)	mm	620x425x1070
包装 Packing dimensions (W*D*H)	mm	668x473x1144
装柜量 Cntr. Loading (20'/40'/40'HQ)	EA	82/170/170
净重 Net weight (kg)	Kg	69
毛重 Gross weight (kg)	Kg	87

适用环境 Applicable ambient

适用环境温度 Ambient temp	°C	5°C-35°C
适用空间面积 Applicable area	M ²	150-200
排水形式 Drainage mode	自然排水	



电气参数 Electronical data			
产品型号 Model		LD168-02CE/ LD168-02DE	
电源 Power supply		Ph-V-Hz	230V-50HZ
控制面板 Control		Electronic	
除湿量 Dehumidification	30°C,RH80%	L/Day	168
功率 Power consumption		W	1500
冷媒 Refrigerant type		g	R290/ R410A
水箱容量 Water tank volume		L	NA
风量 Air flow		m3/h	2000
产品规格 Dimension & Weight			
产品尺寸 Unit dimensions (W*D*H)		mm	620x425x1670
包装 Packing dimensions (W*D*H)		mm	650x455x1820
装柜量 Cntr. Loading (40'HQ)		EA	91pcs
净重 Net weight (kg)		Kg	75
毛重 Gross weight (kg)		Kg	83
适用环境 Applicable ambient			
适用环境温度 Ambient temp		°C	5°C-35°C
适用空间面积 Applicable area		M ²	150-200
排水形式 Drainage mode		自然排水	



United International Co, Ltd.

12F, No. 520, Sec.4, Jen-Ai Road, Taipei, Taiwan

+886(02) 2720-5102

<http://united-airmaster.com>



AMAZON



ALIBABA



UNITED WEBSITE